


CAMBRIDGE ACCUSENSE Micro Profile Airflow Sensor UAS2000



features

- The UAS2000 measures air velocity and airflow temperature simultaneously
- Measure flow in tight locations previously not feasible.
- Sensors connect to the °C Port3600 data acquisition instrument
- Easy to use – just plug in and start measuring
- Validate thermal and airflow models quickly and accurately
- Small sensors to reach distant and compact locations
- Accuracy to $\pm 10\%$ of reading at 25°C, 20% of reading full velocity range at 15-60°C

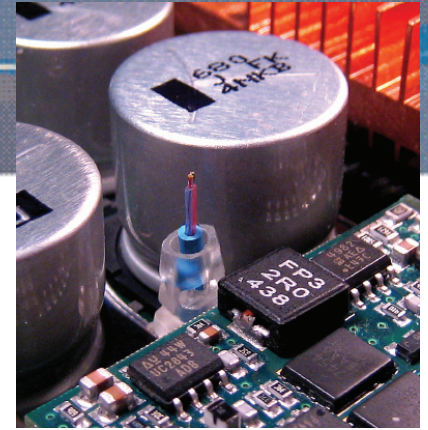

overview

DegreeC 's Cambridge AccuSense™ UAS2000 Series is an air velocity and air temperature sensor used with the °C Port3600 Measurement System. Developed to meet the thermal profiling needs of ever shrinking electronics systems, accurate measurements can now be made in areas previously considered too small.

With a range from 0.50 m/s to 10 m/s (99-1960 fpm), the UAS2000 offers such features as unimpaired access to tight locations, improved measurement accuracy with $\pm 10\%$ of reading within the range of 200 to 1960 fpm at 25°C, or 20% over the full velocity and temperature range, and full probe interchangeability.

The unique omni directional micro sensor head, remotely located on a 3 meter cable, allows access in distant and compact locations such as between semiconductor devices, heat sinks, and inside ducts and plenums. This extremely small head causes minimal distortion of the true airflow picture, and air velocity and airflow temperature measurements are obtained at the same time.

The UAS2000 Series sensors are also fully interchangeable with one another, as each sensor has its own on-line circuitry normalizing the performance of each sensor.


Simultaneous use of up to 36 UAS sensors with the °C Port3600 data hub allows the user to have a snapshot of the airflow environment at any given time. For surface temperature measurement, please refer to the UTS1000 Thermocouple Sensors datasheet. For humidity measurements please refer to the UHS1000 datasheet. The UAS1000 series, UAS2000, UTS1000 and UHS1000 can be used simultaneously with the °C Port3600 data hub to obtain airflow, air temperature, humidity and surface temperature in one instrument. Choose the size of the UAS sensor that best fits your requirements.



°C Port3600 Data Acquisition Hub for USB Sensors

Micro Profile Airflow Sensor - UAS2000

Standard medium is air at standard pressure (101.3 kPa, 29.95" Hg).
For use with other gases, please contact Degree Controls.
Altitude compensation is available in Cambridge AccuTrac™ software.

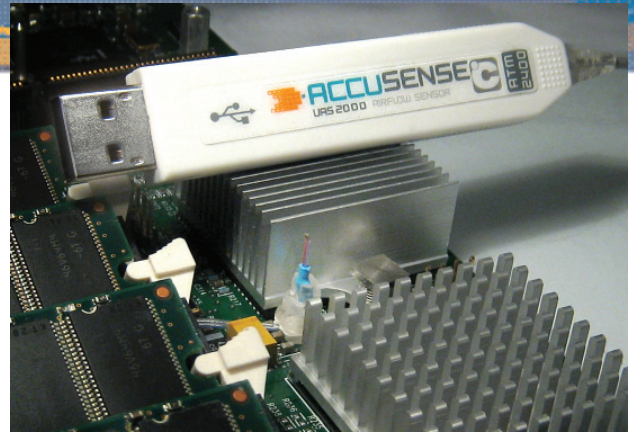

specifications UAS2000 0.50 - 10.0 m/s (99 - 1960 fpm)

Air Velocity Accuracies

±10% of reading from 200 - 1960 fpm at 25°C
±20% of reading over full velocity and temperature range
Repeatability: ±5% under same conditions


Airflow Temperature Accuracies

0 - 60°C ±3°C
Repeatability is ±5% under same conditions

Operating temperature	15°C to 60°C
Storage temperature	-40°C to 80°C
Relative humidity (non-condensing)	5-95%
Warm up time after power up	Less than 5 seconds
Supply voltage	Supplied by the ATM data hub

Sensor USB Connector

100mm long X 17mm wide X 8mm thick
Standard cable length is 3 meters from

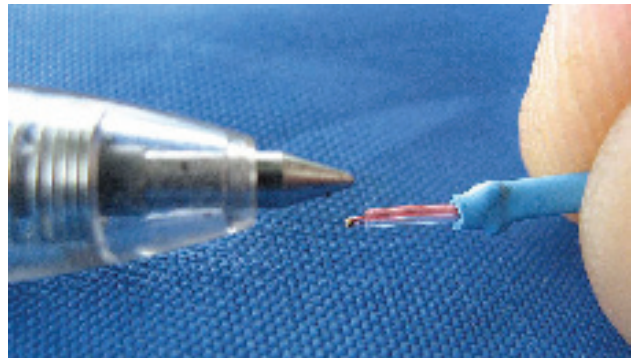

Domicilio Social de Maranata-Madrid SL:

Urb. El Mirador, c/Chorrillo Alto, 41 Plta. 2, Pta. 3
28860 Paracuellos de Jarama (Madrid) España
Teléfono: 91-6292106 656 805 314

Oficinas de Maranata-Madrid SL en:

C/Fresno 1
28110 Algete (Madrid) España
Teléfono: 91-6292106 Fax: 91-6280453
Email: info@alphaomega-electronics.com